

ATC WBR1 Series Wire Bond Resistors (Top Contact/Bottom Isolated)


Features:

- Resistance Range: 2.5 K Ω to 250K Ω *
- Outline Size: 20 x 20 mils (0.51 x 0.51 mm)
- Passivated SiCr Resistor Material
- Gold Wire Bondable
- Ultra-High Stability
- Extremely Low TCR available (± 25 ppm/ $^{\circ}$ C)
- Laser Trim for Tight Tolerances
- Top Contact / Bottom Isolated
- Unique A-Face Value Marking
- Ideal for Hybrid Circuit Applications

*Custom resistance values to 10 M Ω and aluminum bond pads are available. Please contact Factory.

American Technical Ceramics offers the WBR1 Series precision Wire Bondable Resistors. These resistors are designed specifically for applications that require stable thermo-compression, ultrasonic or epoxy die attachment. This device is built in an 0202 chip outline and is ideal for but not limited to hybrid circuit applications.

The WBR1 utilizes our proprietary SiCr thin film resistor. This results in extremely tight tolerances and superior Temperature Coefficient of Resistance (TCR). Tolerance of $\pm 0.1\%$, with absolute TCR of ± 25 ppm/ $^{\circ}$ C is available. The WBR1 offers excellent stability and reliability and is suitable for the most demanding applications.

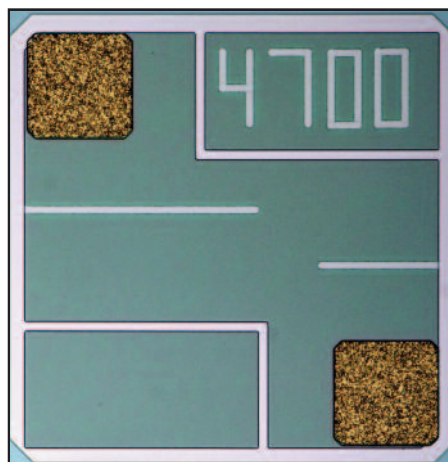


Applications:

- Hybrid Chip on Board Circuits
- Multi Chip Module (MCM)
- Bias Networks
- Test and Measurement Equipment
- Aerospace
- Medical
- Automotive


EIA resistance values with 1% tolerance are available for sampling. Please contact Factory.

RESISTANCE VALUES (K Ω)					
2.7	6.8	15	33	68	150
3.3	8.2	18	39	82	180
4.7	10	22	47	100	
5.6	12	27	56	120	

NOTE: Values listed are for TCR <100 ppm/ $^{\circ}$ C

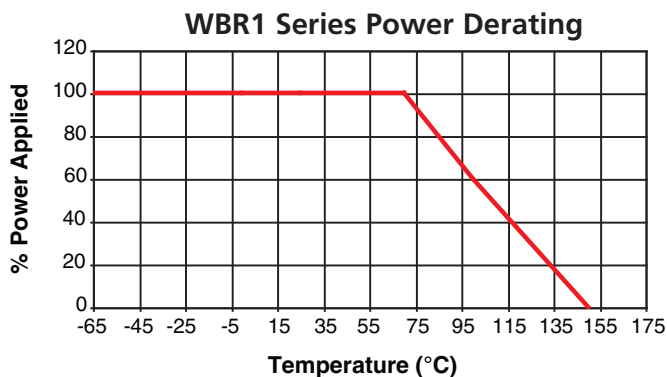

250 mW (70 $^{\circ}$ C, derated to 0 at 150 $^{\circ}$ C) on alumina

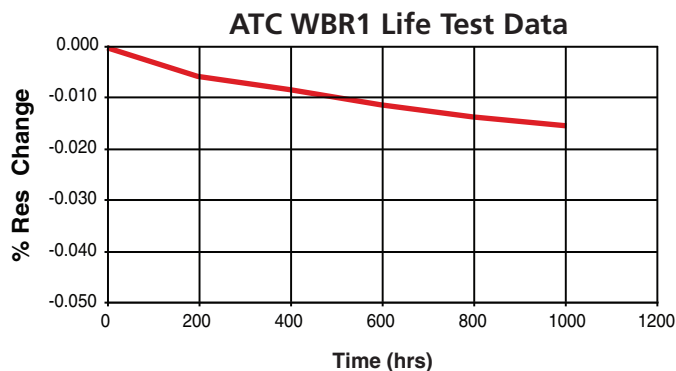

AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759
sales@atceramics-asia.com



ATC WIRE BONDABLE RESISTIVE PRODUCTS


Resistor Materials

Substrate Material	Oxidized Silicon
Resistor Material	Silicon Chrome (SiCr)
Backing	None, Lapped Silicon
Bonding Pad Material	Gold

Mechanical Configurations inches (mm)

Size	Length (L)	Width (W)	Thickness (T)	Bond Pad
0202	.020 ±.004 (0.51 ±0.10)	.020 ±.004 (0.51 ±0.10)	.010 ±.002 (0.25 ±0.05)	.0038 x .0038 (0.09 x 0.09)

Outline Dimensions

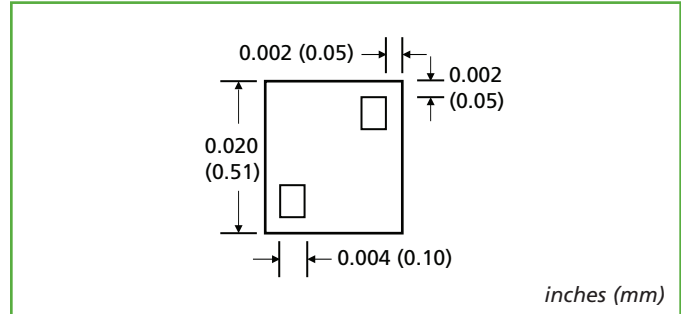

General Specifications

Resistor	Detail
Package Outline	0202
Resistance Range	2.5 KΩ to 250 KΩ *
Power Rating	250 mW (70°C, derated to 0 at 150°C) on alumina
Termination	Gold Wire Bond
Tolerances	0.1, 0.5, 1%
Operating Temperature	-55°C +125°C
Temperature Coefficient of Resistance	±25, ±50, ±100 ppm/°C
Maximum Rated Voltage	125 volts
Insulation Resistance	10 ⁶ MΩ

*Custom Designs up to 10 MΩ available

Environmental Tests

Test	Limit	Condition
Life Test	±0.25% max	1000 hrs., 125°C @ 50 mW
Thermal Shock	±0.25% max.	IAW MIL-STD-202, condition B
High Temperature Exposure	±0.25% max.	100 hrs. @ 150°C
Moisture Resistance	±0.25% max.	IAW MIL-PRF-55342
Wire Bond Test	4 grams min. (1.25 mil wire)	IAW MIL-PRF-55342
Short-Time Overload	±0.25% max.	IAW MIL-PRF-55342

ATC Part Number Code

ATC WBR 1 470 1 F G D W

Name _____
 Type _____
 Resistance Value (Ω)
 3 significant digits _____
 R = Decimal Point
 Multiplier _____

Packaging: Waffle Pack
 Temperature Coefficient of Resistance (TCR - ppm/°C)
 C = ±25, D = ±50, E = ±100
 Termination
 G = Gold Wire Bond
 Tolerance

RESISTOR TOLERANCE			
Code	B	D	F
Tol.	±0.1%	±0.5%	±1%

The above part number refers to an ATC WBR1 (0202), 4700 Ohms, F tolerance (1%), Gold Wire Bond Terminations, TCR of 50 ppm/°C, Waffle Pack Packaging

ATC accepts orders for our parts using designations with or without the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at +1-631-622-4700.

Consult factory for additional performance data.

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 2012 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1109; Rev A, 5/12



AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759
sales@atceramics-asia.com



www.atceramics.com