


ATC 531Z Broadband Multilayer Capacitors

Features:

- EIA 0201 Case Size
- Capacitance: 100 nF
- Operating Frequency: 16 KHz to 30 GHz
- Insertion Loss: < 0.5 dB typ.
- Low Loss X5R Dielectric
- Voltage Rating: 16 WVDC
- Solderable SMT Terminations
- RoHS Compliant Terminations

ATC's new 531Z Series Multilayer Broadband Capacitor provides low insertion loss performance over multiple octaves of frequency spectrum. The 531Z capacitor is compatible with high speed automated pick and place SMT manufacturing.


The 531Z is ideal for broadband DC blocking, coupling, bypassing, and feedback applications in optical communications systems and equipment using high-speed digital logic.

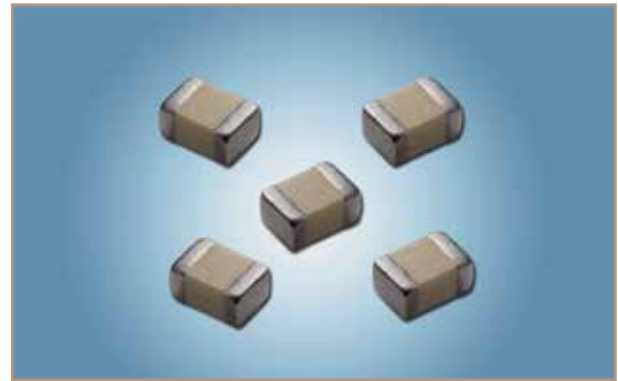


Advantages:

- Broadband Performance
- Low Insertion Loss
- Flat Frequency Response
- Excellent Return Loss through 30 GHz
- Unit-to-Unit Performance Repeatability
- Rugged Ceramic Construction

531Z Insertion Loss (S21)

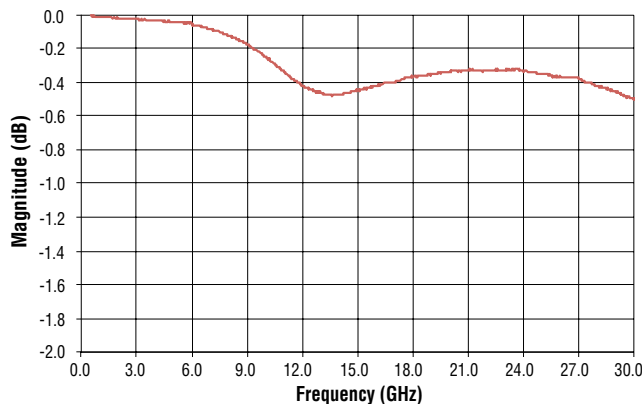

531Z Return Loss (S11)

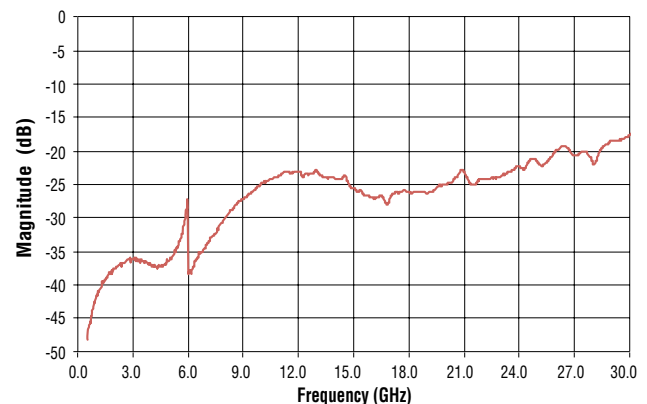

ATC 531Z Data Sheet Test Condition Description

All testing performed on 10-mil-thick Rogers R03006 microstrip board, with the UUT subtending a 10 mil gap in a 14.2-mil-wide center trace (nominal 50-ohm characteristic impedance). Measurements were made using an Anritsu 3680K Universal Test Fixture and an Anritsu 37269D Vector Network Analyzer having a four-receiver architecture. Measurements have been de-embedded to the edges of the UUT using a standard TRL calibration procedure.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



THE ENGINEERS' CHOICE®

www.atceramics.com

ATC 001-1190
Rev. A; 7/18

