


PRODUCT FEATURE

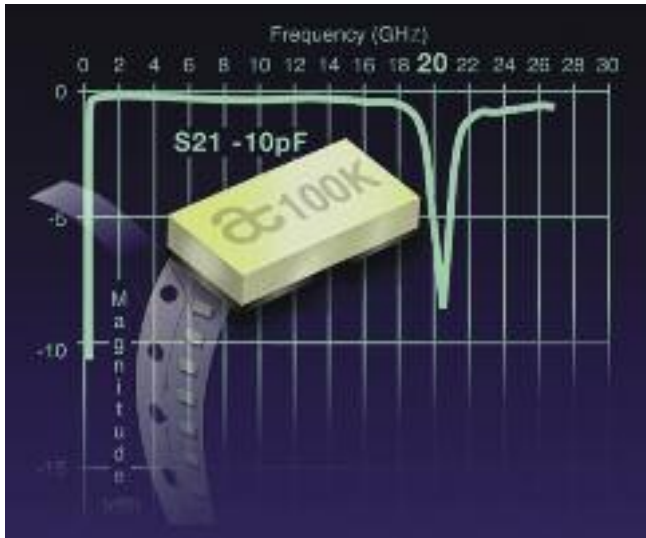

SURFACE-MOUNT NPO CAPACITORS WITH ULTRA-HIGH SELF-RESONANT FREQUENCIES

As surface-mount technology responds to the challenge of functioning at higher microwave frequencies, the performance demands on both active and passive components have become increasingly stringent. Typically, ceramic multilayer chip capacitors (MLC) are required to operate at frequencies closer to (or even exceeding) those at which they are self-resonant. Alternate approaches using fragile, lower parasitic,

compromise performance by adding series inductance and resistance, as well as necessitating additional manufacturing effort and costs.

The ATC500 series capacitors provide a capability that was previously unavailable: rugged, surface-mountable, stable NPO-temperature-characteristic, laser-marked devices with very high self-resonant frequencies in values up to 10 pF. The new capacitors have first

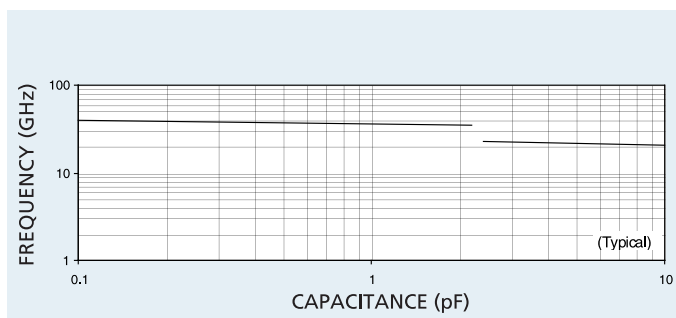


Fig. 1 Typical first parallel resonant frequency.

single-layer capacitors (SLC) (typically 0.004" to 0.006" thick to achieve useful capacitance values) involve difficult trade-offs between meeting the temperature characteristics necessary for sensitive tuned circuit and impedance-matching applications, and maintaining the form factor and mechanical robustness necessary for large-scale, surface-mount production. SLCs requiring bonding wires for attachment

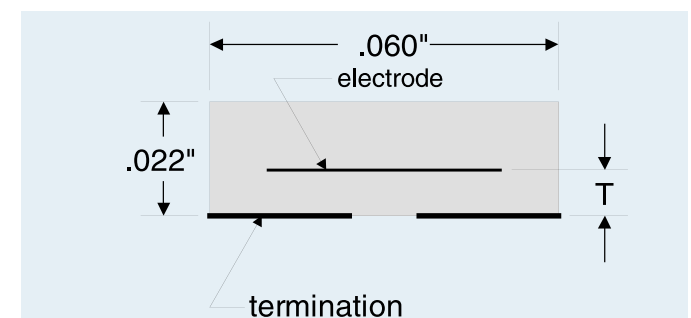


Fig. 2 Typical longitudinal cross section.

parallel resonant (FPR) frequencies exceeding 35 GHz for values of 0.1 to 2.2 pF and exceeding 20 GHz for values up to 10 pF, as shown in **Figure 1**.

Two attributes enable the ATC500 capacitors to achieve superior performance: They utilize a new type of ceramic dielectric and a unique, patented construction. **Figure 2** shows a typical longitudinal cross section.

PRODUCT FEATURE

**TABLE 1
KEY SPECIFICATIONS**

Capacitance range	0.1 to 10.0 pF
Tightest tolerances	
0.1 to 1.0 pF	± 0.05 pF
1.1 to 6.2 pF	± 0.10 pF
6.8 to 9.1 pF	± 0.25 pF
10 pF (%)	±2.00%
FPR frequency (typ) (GHz)	
0.1 to 2.2 pF	> 35 GHz
2.4 to 10.0 pF	> 20 GHz
Equivalent series resistance (typ)(mΩ)	200 @ 1 GHz
Temperature Coefficient of Capacitance	
0.1 to 2.2 pF	0 ± 30 ppm/°C
2.4 to 10.0 pF	0 ± 60 ppm/°C
DC Working Voltage	
0.1 to 4.7 pF (VDC)	100
5.1 to 10.0 pF (VDC)	50
Size (")	0.060 x 0.030 x 0.022

An internal gold electrode forms twin capacitors with external, readily solderable terminations. The difference between this configuration and prior versions is the encapsulation of the active structure within a dielectric body. This construction permits the separation between the internal electrode and terminations to be extremely small (less than 0.5 mils for the larger capacitance values) without sacrificing mechanical integrity. Thus, for a given footprint, higher capacitance values can be achieved with-

out resorting to higher dielectric constant materials (as required by SLCs) and their concomitant increased loss and poorer temperature characteristics. The high FPR makes these capacitors ideally suited for broadband dc blocking/RF coupling applications. Intended primarily to subtend a gap in a microstrip center conductor, the capacitors' 0.030" width produces minimal parasitics in 50 Ω transmission lines on substrates such as 0.025"-thick alumina (K = 9.9), or 0.010"-thick Duroid 5880 or Arlon Isoclad 917 (K = 2.2). Additional applications include use as a filter element or impedance-matching element. In these applications, the low equivalent series inductance produces a response that is more capacitor-like than comparable-size and comparable-value MLCs, while the NPO characteristic provides stable temperature behavior that is superior to comparable-value SLCs. **Table 1** lists the ATC500 capacitors' salient specifications.

The ATC500 capacitors' significant electrical advantages and thermal stability combined with their rugged, laser-marked, surface-mount package provide designers with uniquely versatile devices to help meet today's demanding wireless applications. The capacitors are available currently with a delivery time of stock to four weeks.

American Technical Ceramics
Huntington Station, NY
(631) 622-4700
(631) 622-4748 FAX
e-mail: sales@atceramics.com
http://www.atceramics.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 1998 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-887; Rev B, 12/02



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
 sales@atceramics.com

ATC Europe
 sales@atceramics.com

ATC Asia
 sales@atceramics-asia.com



www.atceramics.com

Reprinted with permission of MICROWAVE JOURNAL® from the June 1998 issue.
 ©1998 Horizon House Publications, Inc.